

### SPECIFICATIONS

#### Input

- **Voltage:** 18-30 VAC
- **Frequency:** 50-60 Hz
- **Power Consumption:** 1 watt maximum

#### Output

- **O, W2:**
  - **Type:** Relay
  - **Form:** DPST, normally open
  - **Rating:** 1 amp @ 30 VAC
- **OF1, OF2:**
  - **Type:** Relay
  - **Form:** SPDT, normally closed
  - **Rating:** 1/2 HP @ 240 VAC
- **T2:**
  - **Type:** Relay
  - **Rating:** 1 amp @ 30 VAC


#### Time Delays

- **Defrost:** Fixed at 10 minutes (+/- 5%)
- **Interval Between Defrost:**
  - Pin selectable (30/50/90 minutes)
- **Test Time:** Short across test terminals (TEST) to reduce test time by 256x

#### Mechanical

- **Dimensions:** 4.5" x 5"
- **Mounting:** Surface mount using (4) #6 or #8 screws, or plastic stand offs

### WIRING DIAGRAM

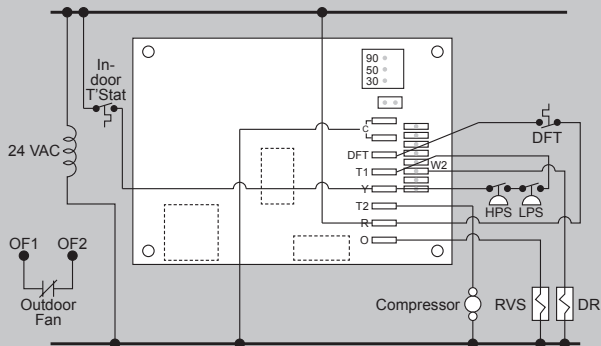

DR = Defrost Relay Coil  
 DFT = Defrost Thermostat

LPS = Low Pressure Switch  
 HPS = High Pressure Switch

RVS = Reversing Valve Solenoid